


Standard Unit - 1" Setback

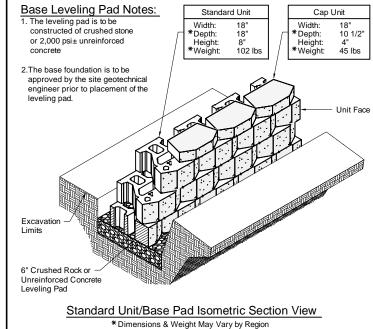

8" Min. Low Permeable Soil Keystone Cap Unit Keystone Standard Unit 24" -Unit Drainage Fill (3/4" Crushed Rock or Stone) Reinforced Soil -Finished Grade Grid Depth 8" Min. Low Permeable Soil Keystone Cap Unit Unreinforced Concrete or Crushed Stone Retained Soil Leveling Pad Keystone Standard Unit Reinforced Soil Unit Drainage Fill (3/4" Crushed Rock or Stone) Approximate Limits 1/8" - 1/4" of Excavation Grid Depth Finished Grade 4" Perforated PVC Drainage Tile Note: Unreinforced Concrete When site conditions require, wrap drainage or Crushed Stone tile in 3/4" aggregate and filter fabric with Leveling Pad (Foundation Soil) drainage composite or aggregate back drain system, as directed by geotechnical engineer


Typical Reinforced Tiered Wall Section


Standard Unit - Near Vertical Setback


Copyright 2003 Keystone Retaining Wall Systems


Design is for internal stability of the KEYSTONE wall structure only. External stability, including but not limited to foundation and slope stability is the responsibility of the Owner. The design is based on the assumption that the materials within the retained mass, methods of construction, and quality of materials conform to KEYSTONE's specification for this project.

This drawing is being furnished for this specific project only. Any party accepting this document does so in confidence and agrees that it shall not be duplicated in whole or in part, nor disclosed to others without the consent of Kevstone Retaining Wall Systems, Inc.

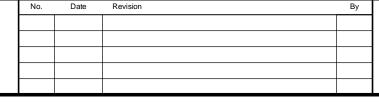

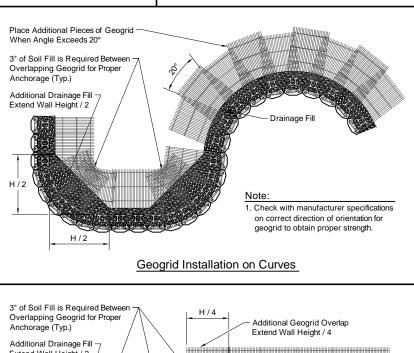

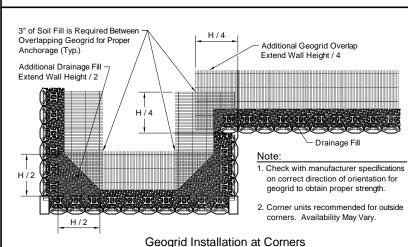

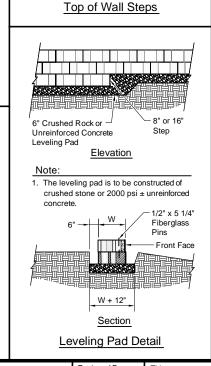

RKM

CDM

No Scale

Checked By

Scale:


 Secure all cap units with Keystone Kapseal or equal.

(2) - 4" Cap Units or

(1) - 8" Cap Unit

- 4" Cap Unit

8" Keystone

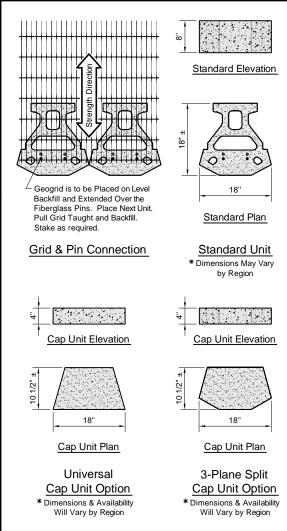

Project No:

Drawing No:

Standard Unit 18 - Tri Plane Face Details

Keystone Retaining Wall Systems

Typical Wall Details



Minneapolis, MN 55435 952-897-1040