


M I S C E L L A N E O U S D E T A I L S

WALL REPAIR ◀

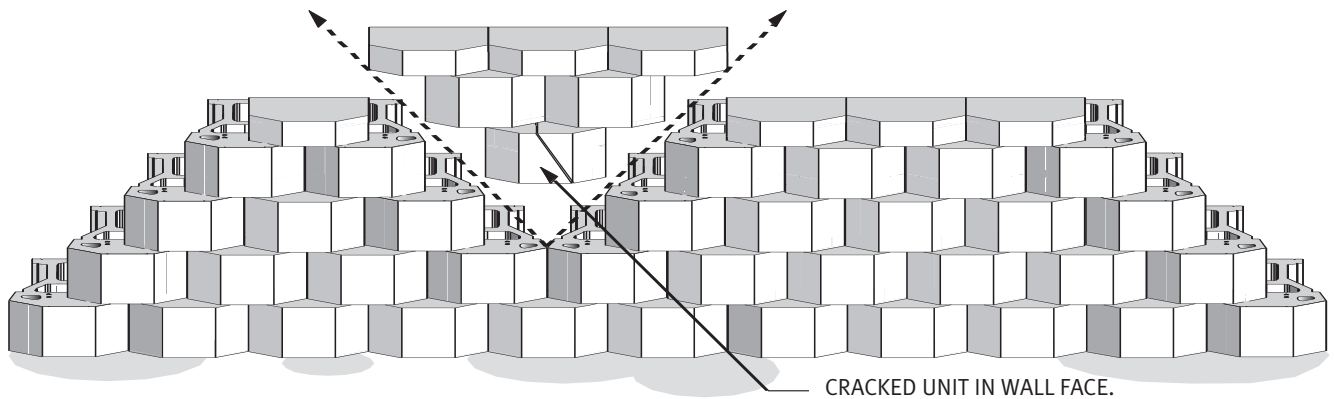

PROBLEM: Damaged or cracked unit in wall.

SOLUTION:

- ▶ For minor cracks, fill opening with construction epoxy and dust lightly with concrete material of similar color. Use a ground up piece from another Keystone® unit.
- ▶ For low height walls, dismantle units down to broken unit(s), replace with new unit(s). Rebuild wall placing core-fill and backfill with necessary light compaction until capping of wall as shown in above detail.
- ▶ For taller walls or where it is not practical to dismantle the wall, follow steps shown in the details below.
Note: Solution allows wall to remain intact. Wall structure with geogrid soil reinforcement is not interrupted.

